

Rivet Nutter Tool



This hand tool is for inserting both rivet nuts and threadserts. It allows for quick adjustment to any size hand.

#325RN

This model is a heavy duty tool that will install 1/4-20, 5/16-18 and 3/8-16 rivet nuts and threadserts in aluminum and steel. Comes equipped with a 1/4-20 mandrel and nosepiece.



Order #	Price Ea.
67748525	\$213.73

Rivet Nut Tool & Kits



Thread Setter Tool



Thread Setter Kit



Thread-Sert Kit

- Quality threaded insert installation tools
- Patented bearing design • Comfortable hand grips
- Set features 1 tool and assorted "Poly" and/or "Rivet" nuts in standard inch or metric sizes


Desc.	Size Range		Material	Order #	Price Ea.
	Min.	Max			
Thread Setter Tool	8-32	10-32	Steel	00270066	\$63.69
Thread Setter Kit	6-32	10-24	Steel	00270074	104.09
Klik Thread-Sert Kit	6-32	3/8-16	Aluminum	00270082	84.92
Klik Thread -Sert Kit	6-32	3/8-16	Steel	00270090	84.92

Threaded Inserts




- For use on materials at least 1/32" (.0937) thick
- Threadserts are simply screwed onto a pilot screw & pushed into a pre-drilled or punched hole—no tapping, welding, or brazing
- Internal threads are immediately ready for a screw or bolt
- For metal or any rigid material

Completed Application




Thread Size	Drill Size	Pkg. Qty.	Steel		Aluminum	
			Order #	Price/Pkg.	Order #	Price/Pkg.
6-32	#2	100	67747881	\$16.82	67748160	\$16.09
8-32	1/4"	100	67747923	18.35	67748202	18.11
10-24	5/32"	100	67747964	18.62	67748244	18.98
10-32	3/32"	100	67748004	18.62	67748285	18.98
1/4-20	25/64"	50	67748046	14.76	67748327	13.22
5/16-18	1/2"	25	67748087	12.58	67748368	12.06
3/8-16	9/16"	25	67748129	15.03	67748400	15.47



Nylon Round Head Solid Rivets



Body L (In.)	Pkg. Qty.	Order #	Price/100
1/8" Dia.			
1/8	100	67357129	\$2.06
3/16	100	67357160	1.95
1/4	100	67357202	2.60
5/16	100	67357244	2.64
3/8			
3/8	100	67357285	2.69
7/16	100	67357327	2.73
1/2	100	67357368	2.60
5/8	100	67357400	2.88




STANDARD BOX QUANTITIES Made of molded acetal - Used for: glides & insulators, etc.

Sonic-Lok® Threaded Inserts for Plastic



- Ultrasonically or heat installed • Made of brass
- Self-aligning and self-locating pilot end
- Can be used in thin wall designs
- Pull-out and torque resistance equal to molded-in inserts
- Available in Headed and Unheaded Styles
- Sold in packages of 1000 pieces



Unheaded

Order 1 package and receive 1000 pcs.

Thread Size	OAL L (In.)	Insert Dia. D (In.)	Pilot Dia. P (In.)	Rec. Hole Size (In.)	Min. Wall Thick. (In.)	Order #	Price/Pkg.
2-56	0.157	0.142	0.123	0.126	0.051	67214841	\$56.62
4-40	0.226	0.182	0.153	0.157	0.063	67214882	54.99
6-32	0.281	0.215	0.184	0.188	0.071	67214924	72.41
8-32	0.321	0.249	0.217	0.221	0.083	67214965	86.80
10-24	0.375	0.279	0.248	0.252	0.102	67215004	104.12
10-32	0.375	0.279	0.248	0.252	0.102	67215046	104.12
1/4-20	0.500	0.342	0.311	0.315	0.130	67215087	169.50
1/4-28	0.500	0.342	0.311	0.315	0.130	67215129	171.20
5/16-18	0.500	0.404	0.374	0.377	0.177	67215160	266.61
5/16-24	0.500	0.404	0.374	0.377	0.177	67215202	266.61
3/8-16	0.500	0.495	0.465	0.468	0.236	67215244	292.06
3/8-24	0.500	0.495	0.465	0.468	0.236	67215285	292.06

Headed


Order 1 package and receive 1000 pcs.

Thread Size	OAL L (In.)	Insert Dia. (In.)	Pilot Dia. P (In.)	Head Dia. A (In.)	Head Thick. (In.)	Rec. Hole Size (In.)	Min. Wall Thick. (In.)	Order #	Price/Pkg.
2-56	0.157	0.142	0.123	0.189	0.018	0.126	0.051	67215327	\$107.80
4-40	0.226	0.182	0.153	0.220	0.021	0.157	0.063	67215368	104.65
6-32	0.281	0.215	0.184	0.250	0.027	0.188	0.071	67215400	115.20
8-32	0.321	0.249	0.217	0.283	0.033	0.221	0.083	67215442	138.77
10-24	0.375	0.279	0.248	0.315	0.040	0.252	0.102	67215483	160.69
10-32	0.375	0.279	0.248	0.315	0.040	0.252	0.102	67215525	160.69
1/4-20	0.500	0.342	0.311	0.374	0.050	0.315	0.130	67215566	235.64
1/4-28	0.500	0.342	0.311	0.374	0.050	0.315	0.130	67215608	235.64
5/16-18	0.500	0.404	0.374	0.433	0.050	0.377	0.177	67215640	288.87
3/8-16	0.500	0.495	0.465	0.550	0.065	0.468	0.236	67215681	511.16

Taper-X® Threaded Inserts for Plastic



- For use in tapered holes
- Superior torque resistance
- Superior pull-out resistance
- Neat clean appearance
- Made of brass

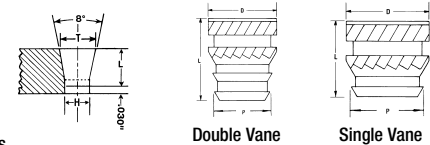

Single and Double Vane

Order 1 package and receive 1000 pcs.

Thread Size	OAL L (In.)	Insert Dia. D (In.)	Pilot Dia. P (In.)	Rec. Hole Size (In.)		Minimum Wall Thickness (In.)	Order #	Price/Pkg.
				T	H			
2-56	0.115	0.141	0.123	0.123	0.118	0.080	67214080	\$56.42
4-40	0.135	0.172	0.157	0.159	0.153	0.093	67214122	54.38
6-32	0.150	0.219	0.203	0.206	0.199	0.116	67214163	68.99
8-32	0.185	0.250	0.230	0.234	0.226	0.133	67214205	79.84
10-24	0.225	0.297	0.272	0.277	0.267	0.159	67214247	98.68
10-32	0.225	0.297	0.272	0.277	0.267	0.159	67214288	98.68
1/4-20	0.300	0.375	0.354	0.363	0.349	0.194	67214320	156.51
5/16-18	0.335	0.469	0.439	0.448	0.431	0.245	67214403	266.61
2-56	0.188	0.141	0.112	0.123	0.107	0.080	67214445	56.42
4-40	0.219	0.172	0.146	0.159	0.141	0.093	67214486	56.30
6-32	0.250	0.219	0.190	0.206	0.185	0.116	67214528	76.35
8-32	0.312	0.250	0.213	0.234	0.208	0.133	67214569	86.80
10-24	0.375	0.297	0.251	0.277	0.246	0.159	67214601	104.12
10-32	0.375	0.297	0.251	0.277	0.246	0.159	67214643	105.16
1/4-20	0.500	0.375	0.332	0.363	0.321	0.194	67214684	174.60
1/4-28	0.500	0.375	0.332	0.363	0.321	0.194	67214726	174.60
5/16-18	0.562	0.469	0.406	0.448	0.401	0.245	67214767	279.66
3/8-16	0.625	0.563	0.493	0.540	0.488	0.293	67214809	337.26

Precision Electronic Nut Drivers



Size (mm)	Order #	Price Ea.
3.00	BK01932417	\$2.85
3.50	BK01932425	2.85
4.00	BK01932433	2.85
4.50	BK01932441	2.85
5.00	BK01932458	2.85
5.50	BK01932466	2.85
6.00	BK01932474	2.85

- Black tip • Nylon engineered plastic
- 50mm working length, 6 3/4" OAL • Socket depth 3/8"
- Soft touch for extended use • Fast turning swivel caps
- AISI 8660 CVM steel with satin finish

